


## PARAFUSO SEXTAVADO ROSCA INTEIRA

ROSCA: UNC - UNF - ASME B1.1 • BSW - Din 11

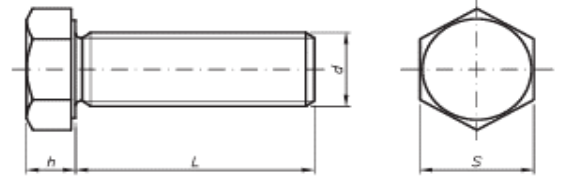

ASME B18.2.1										
d (diâmetro)		3/16	1/4	5/16	3/8	7/16	1/2	1/2	9/16	5/8
rosca/FPP	Grossa	BSW-24	UNC-20	UNC-18	UNC-16	UNC-14	UNC-13	BSW-12	UNC-12	UNC-11
	Fina	UNF-32	UNF-28	UNF-24	UNF-24	UNF-20	UNF-20		UNF-18	UNF-18
s (chave) Máx.	pol.	5/16	7/16	1/2	9/16	5/8	3/4	3/4	13/16	15/16
	mm	7,90	11,11	12,70	14,27	15,87	19,05	19,05	20,63	23,81
h (altura cabeça) Máx.		3,17	4,14	5,33	6,17	7,39	8,20	8,20	9,42	10,23

ASME B18.2.1								
d (diâmetro)		3/4	7/8	1"	1-1/8	1-1/4	1-3/8	1-1/2
rosca/FPP	Grossa	UNC-10	UNC-9	UNC-8	UNC-7	UNC-7	UNC-6	UNC-6
	Fina	UNF-16	UNF-14	UNF-12	UNF-12	UNF-12	UNF-12	UNF-12
s (chave) Máx.	pol.	1-1/8	1-5/16	1-1/2	1-11/16	1-7/8	2-1/16	2-1/4
	mm	28,57	33,33	38,10	42,86	47,62	52,38	57,15
h (altura cabeça) Máx.		12,26	14,30	15,92	18,23	20,65	22,30	24,73

ROSCA: Din 13 (ISO 965)

Din 933 (Din EN ISO 4017) • Din 961 (Din EN ISO 8676)										
d (diâmetro)		M5	M6	M8	M10	M12	M12	M14	M16	M18
rosca/ passo	Grossa	MA-0,80	MA-1,00	MA-1,25	MA-1,50	MA-1,75		MA-2,00	MA-2,00	MA-2,50
	Fina			MB-1,00	MB-1,00	MB-1,50	MB-1,25	MB-1,50	MB-1,50	MB-1,50
s (chave) Máx.		8	10	13	17	19	19	22	24	27
h (altura cabeça) Máx.		3,65	4,15	5,45	6,56	7,68	7,68	8,98	10,18	11,72

Din 933 (Din EN ISO 4017) • Din 961 (Din EN ISO 8676)								
d (diâmetro)		M20	M22	M24	M27	M30	M33	M36
rosca/ passo	Grossa	MA-2,50	MA-2,50	MA-3,00	MA-3,00	MA-3,50	MA-3,50	MA-4,00
	Fina	MB-1,50						
s (chave) Máx.		30	32	36	41	46	50	55
h (altura cabeça) Máx.		12,72	14,21	15,21	17,21	19,26	21,26	23,26