


PORCA SEXTAVADA FLANGEADA TORQUE

ROSCA: UNC - ASME B1.1

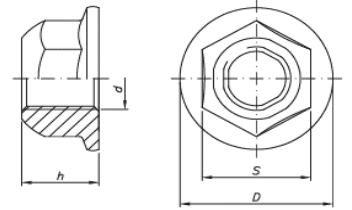

IFI - 100/107

d Diâmetro	rosca/FPP	s (chave) Máx.		h (altura)		d (diâm.da Flange)
		pol	mm	Mín.	Máx.	Máx.
1/4	UNC-20	7/16	11,11	7,02	7,62	14,22
5/16	UNC-18	1/2	12,70	8,67	9,27	17,27
3/8	UNC-16	9/16	14,27	10,09	10,79	20,57
7/16	UNC-14	5/8	15,87	12,07	12,57	23,62
1/2	UNC-13	3/4	19,05	13,09	14,09	27,17

ROSCA: Din 13 (ISO 965)

Din 6927 (Din EN 1664 • 1667)

d Diâmetro	rosca/passos	s (chave)	h (altura)		d (diâm.da Flange)
		Máx.	Mín.	Máx.	Máx.
M6	MA-1,00	10	5,70	6,00	14,20
M8	MA-1,25	13	7,60	8,00	17,90
M10	MA-1,50	15	9,60	10,00	21,80
M12	MA-1,75	18	11,60	12,00	26,00